



13404 Old State Rd. P.O. Box 998
 Middlefield, Ohio 44062
 PHONE: (440) 834-8790 FAX: (440) 834-1950

Gas
 Assisted
 Molding
 Equipment
 and Services

Add-On, Self Actuating Nozzle/Resin Shutoff

Converts your *standard* nozzles into *shutoff* nozzles

Minimize drooling and stringing problems

Designed to withstand today's higher operating temperatures and packing pressures

1/2 to 160 oz. capacity range suitable for most applications

Eliminate the need for expensive single-purpose shut-off nozzles

7/8"-14 Thread
 Just screw onto any standard nozzle

Totally self contained - will not leak


In-stock for immediate shipment!



Exploded view shows internal spring and internal cone

Specifications
<ul style="list-style-type: none"> • H13 tool steel (hardened) • Sized for shots 1/2 to 160 oz. <p>Tip Thread: female 7/8"-14 Nozzle Thread: Male 7/8"-14 Through bore: .400" dia. Thermocouple thread: 1/4"-28 Spring Cracking Pressure: 110 psi Max. Temp: 650° F</p>

Part Numbers and Pricing
<p><u>NAS-000</u>: Nozzle Adapter Shutoff \$1,795.00</p> <p><u>NAS-001</u> Nozzle Adapter Shutoff w/gas port for through-the-nozzle gas assist molding \$1,995.00</p>
<p>Replacement parts</p> <p><u>MC 14951 17-7</u> Internal replacement spring \$61.50</p> <p><u>NAS-DET-3</u> Internal replacement cone \$181.25</p>

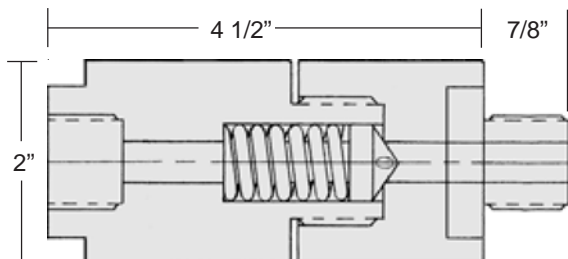

Over 20 Years of Continuous Innovation

NitroJection Corporation 440-834-8790 440-834-1950 - fax info@nitrojection.com

www.nitrojection.com

© 2008, NitroJection Corp.